




D200

(DRAFT VERSION)

BoPP transparent film, wrap around label, suitable for both offset and flexo UV printing

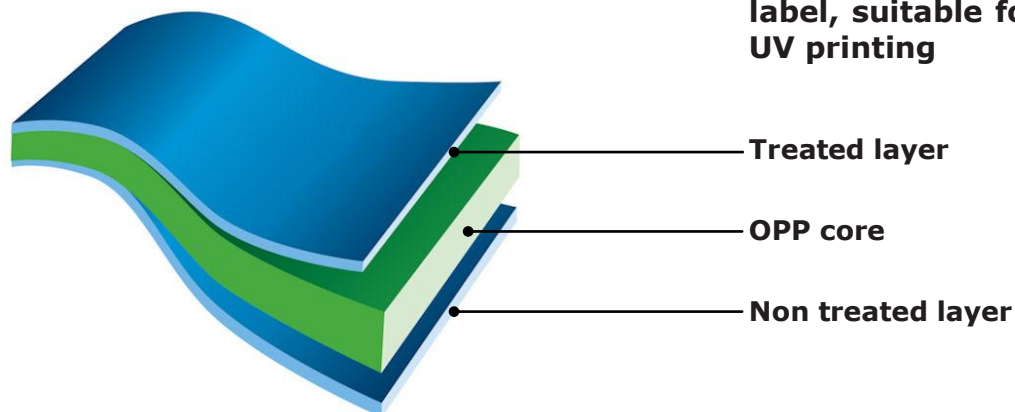

Properties	Method	Unit	Ref.	Typical values	
Thickness	Internal method	µm		30	35
Unit weight		g/m ²		27.3	31.9
Yield		m ² /kg		36.6	31.4
Tensile strength	ASTM D882 DIN 53455	N/mm ²	MD TD	140 280	
Elongation at break		%	MD TD	160 50	
Elastic modulus		N/mm ²	MD TD	2000 3800	
Haze	ASTM D1003	%		2.5	
Gloss (45°)	ASTM D2457	Gloss Unit		85	
Dynamic cof	DIN 53375 ASTM D1894		NT/NT	0.25	
Thermal shrinkage	OPMA TC4(a)	%	MD TD	6.0 3.0	
Treatment level	ASTM D2578	mN/m		36 ÷ 39	

The information given in this Draft Version Document should be considered as target values. It has not to be considered as a product specification. What hereby is indicated has the prime aim of illustrating the main characteristics of our products and the opportunities of usage. Therefore it should not be considered as a guarantee that the product is suitable for the specific customer application. Taghleef Industries total liability for any and all claims, losses or damages, shall in no event exceed the purchase price of the product. In no event Taghleef Industries shall be liable for special, incidental, consequential or exemplary damages.